

LEVELLING ELEMENT TYPE BNV 80/O

Item No.: 08-0032

Square levelling element, moveable levelling bolt available as an option

Highly effective elements, preferably for light to medium-heavy machines.
The movable levelling bolt can compensate for any unevenness of the floor or angular differences of up to $\pm 3^\circ$.

Good resistance to most commercially available coolants, lubricants, and fuels, as well as cleaning agents.

FEATURES

Technical Data	
Load	9,500 N
Material	GG25 / EN-GJL-250
Color	RAL 7037, dusty grey
Temperature range	-20°C up to +80°C

Dimensions	
Length [L1] / [L2]	85 / 75 mm
Width [B1] / [B2]	85 / 75 mm
Height [H]	24 mm
Angle compensation	$\pm 3^\circ$


Insulation pad	
Pad type	B0
Thickness	15 mm
Hardness in Shore A	90 $\pm$ 5

LEVELLING BOLTS (OPTIONAL)


Width across flats			
	M12	M16	M18
WAF1 / WAF2 / WAF3	08 / 08 / 19	12 / 12 / 24	13 / 13 / 27

Bolt length			
	M12	M16	M18
100 mm	19-0042	19-0086	19-0131
125 mm	19-0045	19-0092	19-0134
150 mm	19-0048	19-0095	19-0137
200 mm	-	19-0099	19-0140
250 mm	-	19-0102	19-0143

Incl. 2 x nut DIN 934 and 2 x washer DIN 125

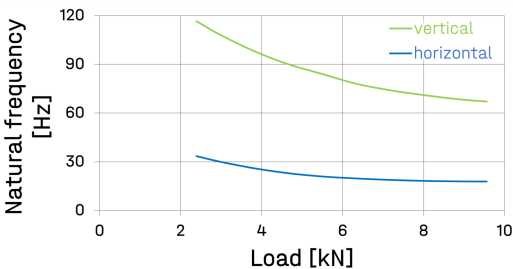

EXEMPLARY ILLUSTRATION

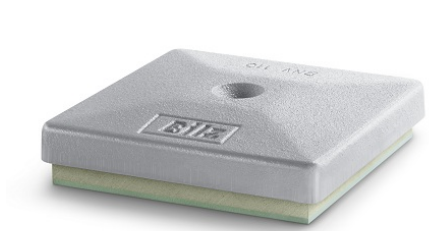

DIMENSIONAL SKETCH

